

3 LOW HEADROOM HOIST NB, REEVING: 04

Hoisting speed (m/min)

Load kg	Class Fem/ISO	F gear + P1/T1 motor		G gear + P1/T1 motor		G gear + P2/T2 motor		H gear + P3/T2 motor	
		High	Low	High	Low	High	Low	High	Low
1600	3m/M6	5	0,8	5	0,8	6,3	1,1	8	1,3
2000	2m/M5	5	0,8	5	0,8	6,3	1,1	8	1,3
2500	3m/M6	-	-	5	0,8	6,3	1,1	8	1,3
3200	2m/M5	-	-	5	0,8	6,3	1,1	8	1,3

Hoist dimensions

HOL m	Length code	M1 mm	H2 mm	H3 mm	L18 mm	W mm	Weight kg
6	A	431	45	220	454	332	180
9,5	C	561	72	350	584	462	200

Motor dimensions

Motor	P1	P2	P3	T1	T2	T3
M2 (mm)	498	558	588	498	498	498
Weight (kg)	21	31	35	22	22	22

Trolley dimensions


B min.	B max.	D1 (∅)	D2 (∅)	H1							
80	410	80	40	151							
L1	L2	L3	L4	L5	L6	L7	L8	L9	L10	L11	L12
102	128	258	520	480	30	250	33	29	145	68	635
L13	L14	L15	L16	L17							
535	190	13	68	46							

D002080_A
062124

C-dimensions

B	C
80 - 270	350
271 - 320	380
321 - 370	410
371 - 410	435

Note: Weight calculated with P1 motor.
Note: All dimensions in mm.

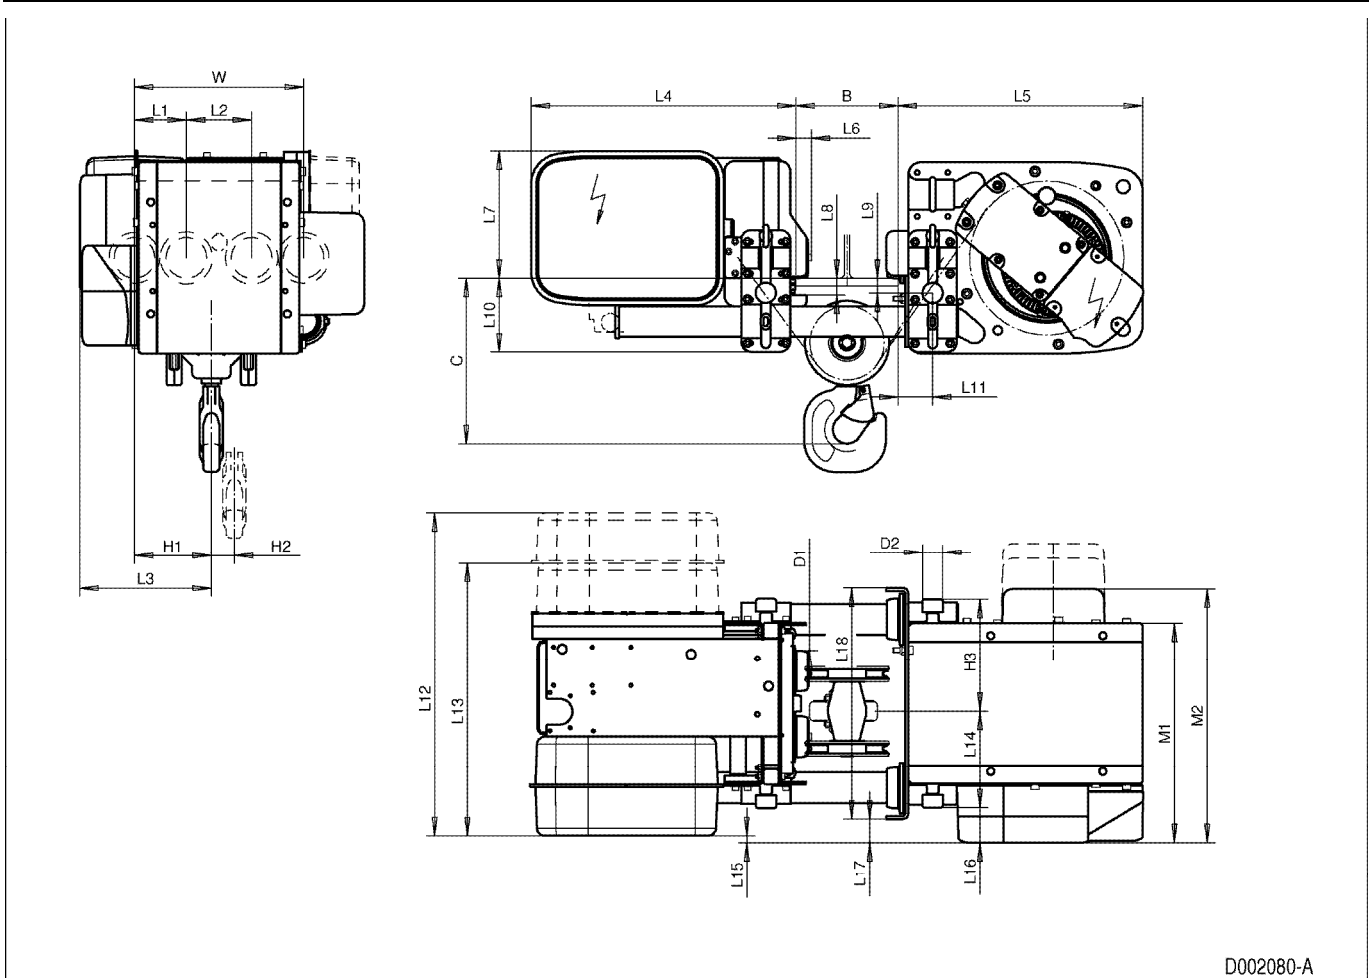

D002080-A