

## 6 LOW HEADROOM HOIST NC, REEVING: 04, EXTENDED LOAD

### Hoisting speed (m/min)

Load kg	Class Fem/ISO	E gear + P3/T3 motor	
		High	Low
6300	1Am/M4	4	0,7

### Hoist dimensions

HOL m	Length code	M1 mm	H2 mm	H3 mm	L17 mm	W mm	Weight kg
6	B	467	49	380	746	420	330
9	C	567	74	480	846	520	350
12	D	667	99	580	946	620	370

### Motor dimensions

Motor	P3	T3
M2 (mm)	597	507
Weight ( kg)	35	22

### Trolley dimensions

B min.	B max.	D1 (Ø)	D2 (Ø)	H1							
100	490	63	125	203							
L1	L2	L3	L4	L5	L6	L7	L8	L9	L10	L11	L12
128	195	366	537	557	38	2	42	242	40	426	746
L13	L14	L15	L16								
647	476	97	79								


D002093\_A  
062511

### C-dimensions

B	C
100 - 199	505
200 - 249	470
250 - 300	440
301 - 350	475
351 - 400	505
401 - 450	540
451 - 490	570

Note: Weight calculated with P3 motor.

Note: All dimensions in mm.

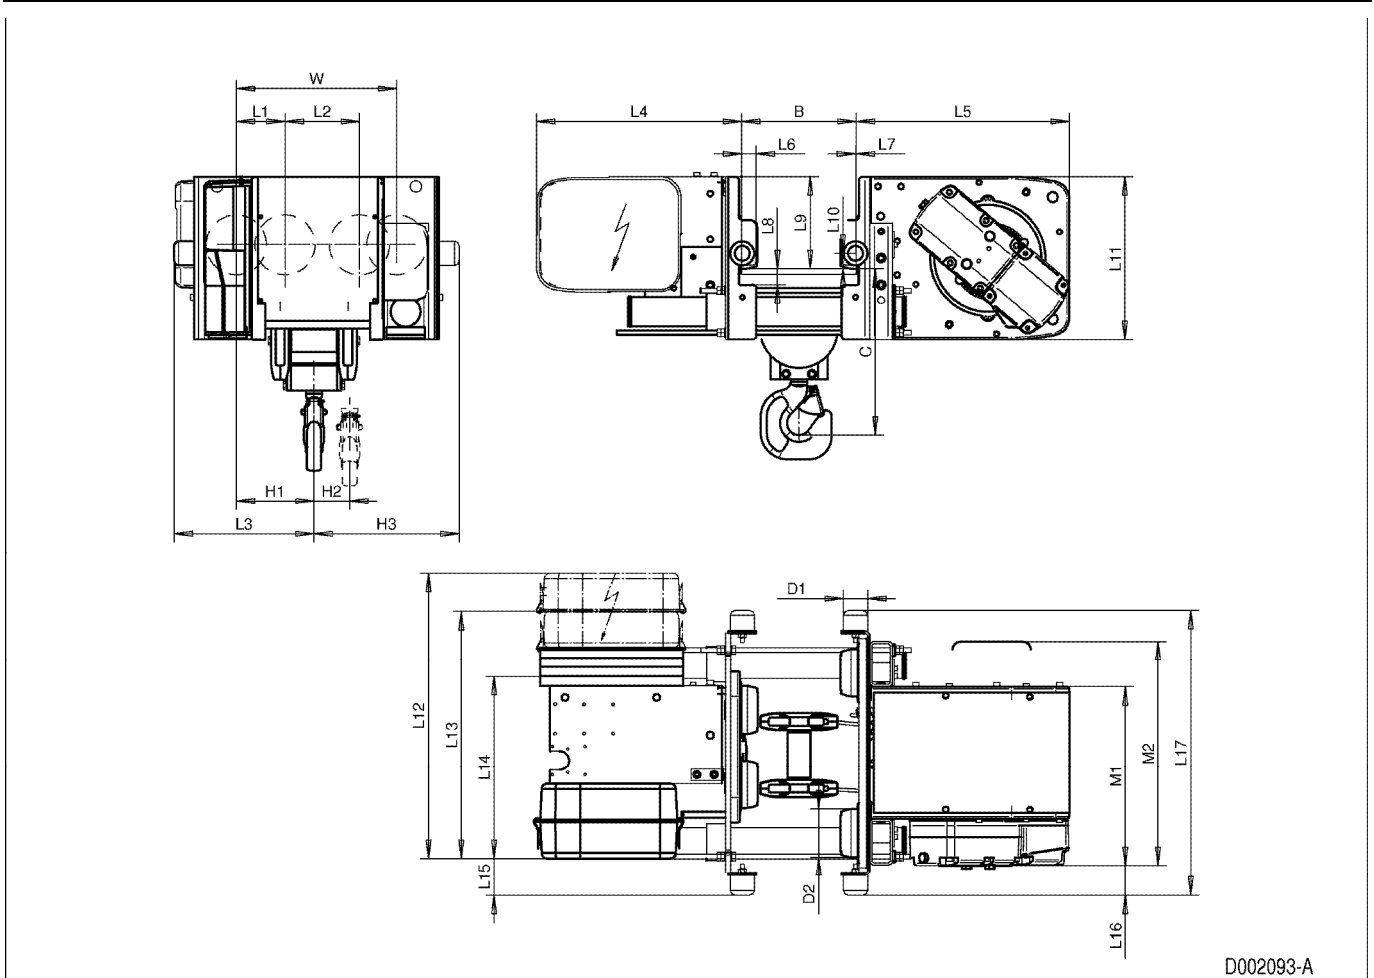

D002093-A