

77 NORMAL HEADROOM HOIST NC, REEVING: 08

Hoisting speed (m/min)

Load kg	Class Fem/ISO	F gear + P3/T3 motor		H gear + P4/T4 motor	
		High	Low	High	Low
8000	2m/M5	2,5	0,4	4	0,7
10000	1Am/M4	2,5	0,4	4	0,7

Hoist dimensions

HOL m	Length code	M1 mm	M3 mm	H2 mm	Weight kg
4,5	C	567	600	37	560
6	D	667	600	49	565
7,5	E	787	600	64	610

Motor dimensions

Motor	P3	P4	T3	T4
M2 (mm)	597	690	507	610
Weight (kg)	35	53	22	45

Trolley dimensions


B min	B max	C	D1 (∅)	D2 (∅)	H1						
80	450	1194	63	100	136						
L1	L2	L3	L4	L5	L6	L7	L8	L9	L10	L11	L12
1106	92	253	148	384	412	32	4	65	40	150	40
L13	L14	L15	L16	L17	L18	L19	L20	L21	L22		
588	428	612	589	800	706	511	47	228	250		

D002104_A
062186

Note: Weight calculated with P3, when B=300mm.

Note: All dimensions in mm.

Note: L19 with one cubicle only, L18 with optional cubicle, L17 with two RST cubicles.

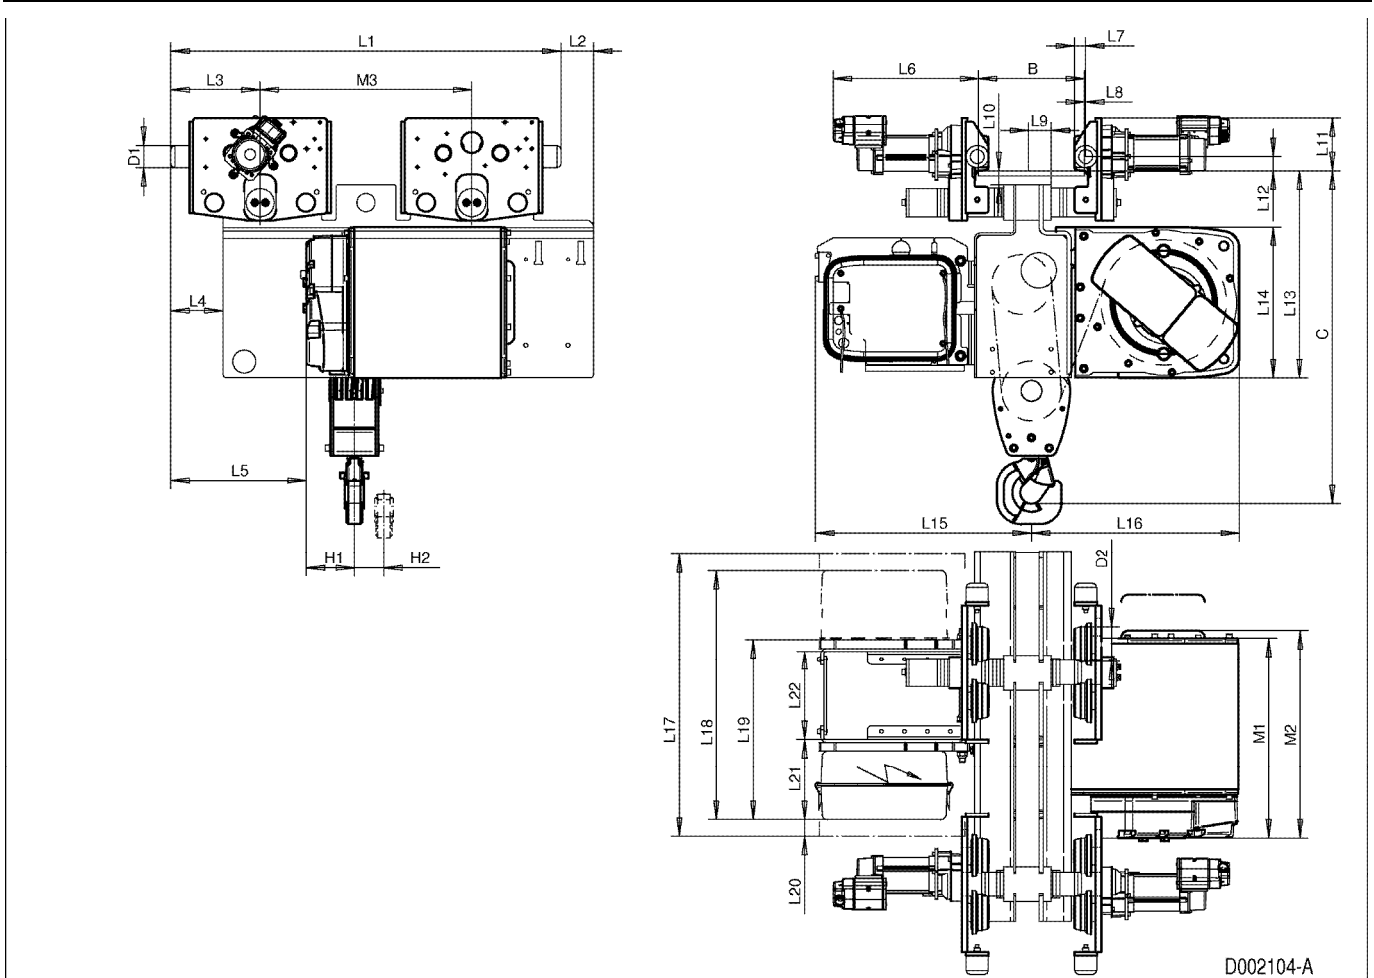

D002104-A